



# ALARM CABLE Nx0.22+2x0.75 PVC



Flexible alarm cable with drain wire and overall Al/PET shielded

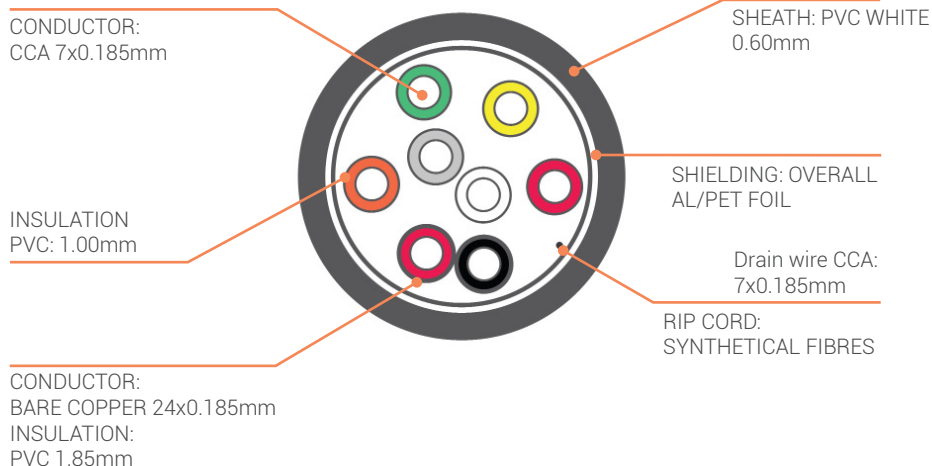

Available Color :



Packing Available:



## COLOR CODE

0.22mm<sup>2</sup>

0.75mm<sup>2</sup>

N°1	White	N°8	Brown	N°15	White/ Green	N°1	Red
N°2	Red	N°9	Violet	N°16	White/ Blue	N°2	Black
N°3	Yellow	N°10	Black	N°17	White/ Grey		
N°4	Green	N°11	Dark Blue	N°18	White/ Yellow		
N°5	Grey	N°12	Pink	N°19	White/ Black		
N°6	Orange	N°13	White/ Brown	N°20	White/ Red		

## ELECTRICAL CHARACTERISTICS

INSULATION AT 20°C	200 MΩ.Km
NOMINAL VOLTAGE (U°/U)	200 V
SECTION 0.158 mm <sup>2</sup>	250 V
SECTION 0.75 mm <sup>2</sup>	
TEST VOLTAGE(1min./50Hz)	1200 V
SECTION 0.158 mm <sup>2</sup>	2000 V
SECTION 0.75 mm <sup>2</sup>	
TYPICAL CONDUCTOR RESISTANCE AT 20°C	265 Ω/km
SECTION 0.158 mm <sup>2</sup>	76 Ω/km
SECTION 0.75 mm <sup>2</sup>	
TEMPERATURE RANGE	-10°C~+80°C

## ORDERING INFORMATION

ITEM	DESCRIPTION	OUTER DIAMETER (MM)	PACKAGING (M)	DoP NUMBER
RSY-AL275PC	(2 x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	5.0 ± 0.5	B100 / D500	RSYA09-23
RSY-AL475PC	(4x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	5.5 ± 0.5	B100 / D500	RSYA10-23
RSY-AL675PC	(6 x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	6.0 ± 0.5	B100 / D500	RSYA11-23
RSY-AL875PC	(8 x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	6.6 ± 0.5	B100 / D500	RSYA12-23
RSY-AL1075PC	(10 x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	7.0 ± 0.5	B100 / D500	RSYA13-23
RSY-AL1275PC	(12 x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	7.1 ± 0.5	B100 / D500	RSYA14-23
RSY-AL1475PC	(14 x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	7.2 ± 0.5	B100 / D500	RSYA15-23
RSY-AL2075PC	(20 x 0.158mm <sup>2</sup> )+(2x0.75mm <sup>2</sup> )	8.0 ± 0.5	B100 / D500	RSYA16-23