


ALARM CABLE Nx0.22 PVC



CONDUCTOR:
CCA 7x0.185mm

SHEATH: PVC
WHITE 0.60mm

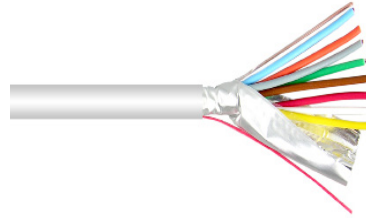

SHIELDING: OVERALL
AL/PET FOIL

RIP CORD:
SYNTHETICAL
FIBRES

Drain wire CCA: 7x0.185mm

INSULATION
PVC: 1.00mm



Available Color :



Packing Available:



CHARACTERISTICS

INSULATION AT 20C°	200 MΩ.Km
NOMINAL VOLTAGE (U°/U)	200 v
TEST VOLTAGE(1min./50Hz)	1200 V
TYPICAL CONDUCTOR RESISTANCE AT 20C°	170 Ω/km
TEMPERATURE RANGE	-10°C~+80°C

COLOR CODE

N°1	White	N°8	Brown	N°15	White/Green
N°2	Red	N°9	Violet	N°16	White/Blue
N°3	Yellow	N°10	Black	N°17	White/Grey
N°4	Green	N°11	Dark Blue	N°18	White/Yellow
N°5	Grey	N°12	Pink	N°19	White/Black
N°6	Orange	N°13	White/Brown	N°20	White/Red
N°7	Light Blue	N°14	White/Violet		

Minimum bending radius 10 x O.D.

ORDERING INFORMATION

ITEM	DESCRIPTION	OUTER DIAMTER (MM)	PACKAGING (M)	DoP NUMBER
RSY-AL22PC	2 x 0.158mm ²	3.1 ± 0.5	B100 / D500	RSYA01-23
RSY-AL42PC	4 x 0.158mm ²	3.8 ± 0.5	B100 / D500	RSYA02-23
RSY-AL62PC	6 x 0.158mm ²	4.4 ± 0.5	B100 / D500	RSYA03-23
RSY-AL82PC	8 x 0.158mm ²	4.7 ± 0.5	B100 / D500	RSYA04-23
RSY-AL102PC	10 x 0.158mm ²	5.5 ± 0.5	B100 / D500	RSYA05-23
RSY-AL122PC	12 x 0.158mm ²	5.8 ± 0.5	B100 / D500	RSYA06-23
RSY-AL142PC	14 x 0.158mm ²	5.9 ± 0.5	B100 / D500	RSYA07-23
RSY-AL202PC	20 x 0.158mm ²	6.7 ± 0.5	B100 / D500	RSYA08-23