



ALARM CABLE Nx6/10 PVC

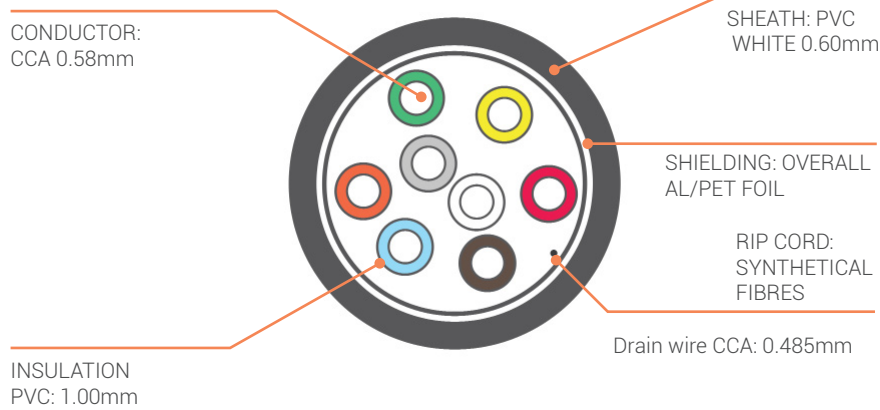

Available Color :

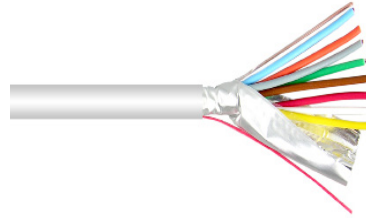

Packing Available:



CHARACTERISTICS

INSULATION AT 20C°	200 MΩ.Km
NOMINAL VOLTAGE (U°/U)	200 v
TEST VOLTAGE(1min./50Hz)	1200 V
TYPICAL CONDUCTOR RESISTANCE AT 20C°	180 Ω/km
TEMPERATURE RANGE	-10°C~+80°C

COLOR CODE

N°1	White	N°8	Brown	N°15	White/Green
N°2	Red	N°9	Violet	N°16	White/Blue
N°3	Yellow	N°10	Black	N°17	White/Grey
N°4	Green	N°11	Dark Blue	N°18	White/Yellow
N°5	Grey	N°12	Pink	N°19	White/Black
N°6	Orange	N°13	White/Brown	N°20	White/Red
N°7	Light Blue	N°14	White/Violet		

Minimum bending radius 10 x O.D.

ORDERING INFORMATION

ITEM	DESCRIPTION	OUTER DIAMTER (MM)	PACKAGING (M)	DoP NUMBER
RSY-AL460PC	4xφ6/10 mm	3.7 ± 0.5	B100 / D500	RSYA17
RSY-AL660PC	6xφ6/10 mm	4.4 ± 0.5	B100 / D500	RSYA18
RSY-AL860PC	8xφ6/10 mm	4.7 ± 0.5	B100 / D500	RSYA19
RSY-AL1060PC	10xφ6/10 mm	5.3 ± 0.5	B100 / D500	RSYA20
RSY-AL1260PC	12xφ6/10 mm	5.7 ± 0.5	B100 / D500	RSYA21
RSY-AL1460PC	14xφ6/10 mm	5.9 ± 0.5	B100 / D500	RSYA22
RSY-AL2060PC	20xφ6/10 mm	6.7 ± 0.5	B100 / D500	RSYA23