
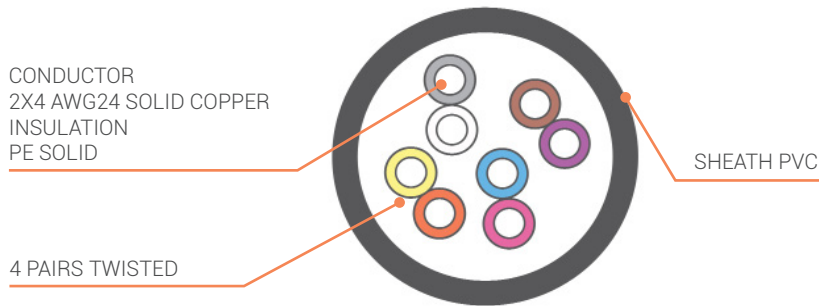


OR 298 PTT GRADE1SE

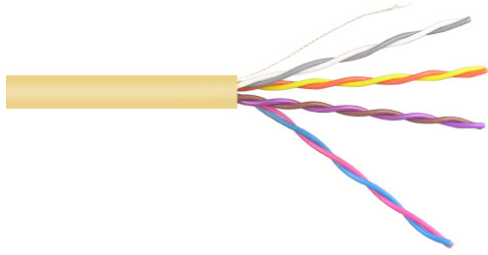

Benefits

- Tested up to 100MHz
- Fire retardant CPR Class Eca

APPLICATION

VOICE	DATA	REMOTE POWER
Analog, ISDN, VOIP	Ethernet up to 1G	POE

Available Color :



Packing Available:



STANDARDS

CABLE	IEC 61156-5 CAT5e
SYSTEM	ISO 11801 ED2.2 Class D EIA/TIA 568-C.2 CAT5e EN 50173-1:2011 Class D

PROPERTIES

MECHANICAL	Bending radius 8x cable diameter
ELECTRICAL	Linear resistance $\leq 95\Omega/\text{Km}$ Characteristic impedance $100\pm 15\Omega$ Nominal velocity propagation 69%

ORDERING INFORMATION

ITEM	PAIRS	SHIELD	OUTER DIAMTER (MM)	PACKAGING (MM)	DoP NUMBER
RSY-PTT2984P01PC	4	U/UTP	5.1	C100 / D500 / TGL	RSYP01-17