


ORSYT 1xP AWG24 GR



Cat.3 INSTALLATION CABLE FOR NUMERIC TELEPHONE

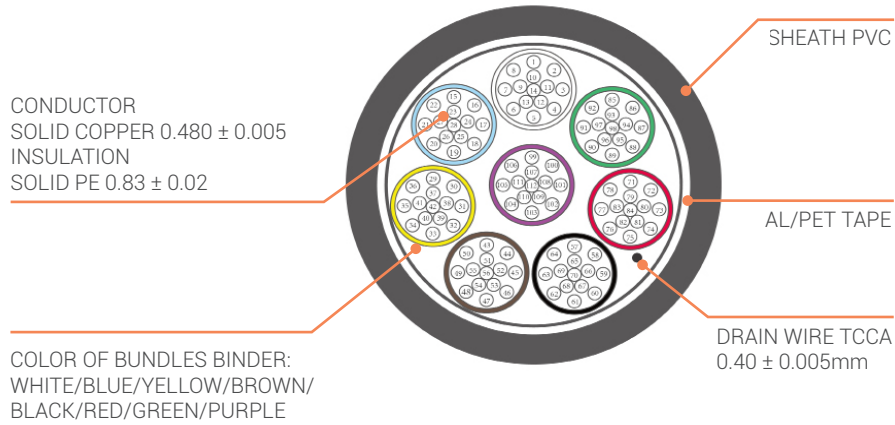

Available Color : ● ●

Packing Available:



PROPERTIES

VOLTAGE ENDURANCE	300 V
TEMPERATURE RANGE	-10°C~+70°C
DIELECTRIC STRENGTH	DC 1500V during 1 min.
INSULATION RESISTANCE	1500 MΩ.Km
CONDUCTOR RESISTANCE	101 Ω/KM

COLOUR OF BUNDLES BINDER

BUNDLE NO	1	2	3	4	5	6	7	8
COLOUR	WHITE	BLUE	YELLOW	BROWN	BLACK	RED	GREEN	PURPLE

CONSTRUCTION OF BUNDLES ACCORDING TO PAIR NUMBER

NUMBER OF PAIRS	ASSEMBLY OF BUNDLES	NUMBER OF PAIRS	ASSEMBLY OF BUNDLES
7	1 BUNDLE OF 7 PAIRS	10	1 BUNDLE OF 10 PAIRS
15	1 BUNDLE OF 15 PAIRS	21	3 BUNDLES OF 7 PAIRS
30	4 BUNDLES OF 7 PAIRS + 2 PAIRS	56	8 BUNDLES OF 7 PAIRS /
112	8 BUNDLES OF 14 PAIRS		4 BUNDLES OF 14 PAIRS

ORSYT 1xP AWG24 GR



Cat.3 INSTALLATION CABLE FOR NUMERIC TELEPHONE

COLOR CODE FROM 1 PAIR TO 112 PAIRS

Pair No	Wire 1	Wire 2	Pair No	Wire 1	Wire 2	Pair No	Wire 1	Wire 2	Pair No	Wire 1	Wire 2
1 / 29 / 57 / 64	Light Blue	White	8 / 36 / 64 / 92	Grey	White	15 / 43 / 71 / 99	Orange	White	22 / 50 / 78 / 106	Purple	White
2 / 30 / 58 / 65	Light Blue	Blue	9 / 37 / 65 / 93	Grey	Blue	16 / 44 / 72 / 100	Orange	Blue	23 / 51 / 79 / 107	Purple	Blue
3 / 31 / 59 / 66	Light Blue	Yellow	10 / 38 / 66 / 94	Grey	Yellow	17 / 45 / 73 / 101	Orange	Yellow	24 / 52 / 80 / 108	Purple	Yellow
4 / 32 / 60 / 67	Light Blue	Brown	11 / 39 / 67 / 95	Grey	Brown	18 / 46 / 74 / 102	Orange	Brown	25 / 53 / 81 / 109	Purple	Brown
5 / 33 / 61 / 68	Light Blue	Black	12 / 40 / 68 / 96	Grey	Black	19 / 47 / 75 / 103	Orange	Black	26 / 54 / 82 / 110	Purple	Black
6 / 34 / 62 / 69	Light Blue	Red	13 / 41 / 69 / 97	Grey	Red	20 / 48 / 76 / 104	Orange	Red	27 / 55 / 83 / 111	Purple	Red
7 / 35 / 63 / 70	Light Blue	Green	14 / 42 / 70 / 98	Grey	Green	21 / 49 / 77 / 105	Orange	Green	28 / 56 / 84 / 112	Purple	Green

ORDERING INFORMATION

ITEM	THICKNESS ± 10%(mm)	OUTER DIAMETER ± 10%(mm)	PACKAGING (MM)	DoP NUMBER
RSY-TEL124PC	0.4 / 0.6	3.6	C100 / D500 / D1000	RSYT01-17
RSY-TEL224PC	0.4 / 0.6	4.6	C100 / D500 / D1000	RSYT02-17
RSY-TEL324PC	0.4 / 0.6	5.1	C100 / D500 / D1000	RSYT03-17
RSY-TEL524PC	0.4 / 0.6	6.3	C100 / D500 / D1000	RSYT04-17
RSY-TEL724PC	0.6 / 0.8	6.7	C100 / D500 / D1000	RSYT05-17
RSY-TEL1024PC	0.6 / 0.8	7.7	C100 / D500 / D1000	RSYT06-17
RSY-TEL1524PC	0.6 / 0.8	8.5	C100 / D500 / D1000	RSYT07-17
RSY-TEL2124PC	0.7 / 0.9	10.3	C100 / D500 / D1000	RSYT08-17
RSY-TEL3024PC	0.7 / 0.9	11.8	C100 / D500 / D1000	RSYT09-17
RSY-TEL5624PC	0.7 / 0.9	15.0	C100 / D500 / D1000	RSYT10-17
RSY-TEL11224PC	0.7 / 0.9	20.6	C100 / D500 / D1000	RSYT11-17