
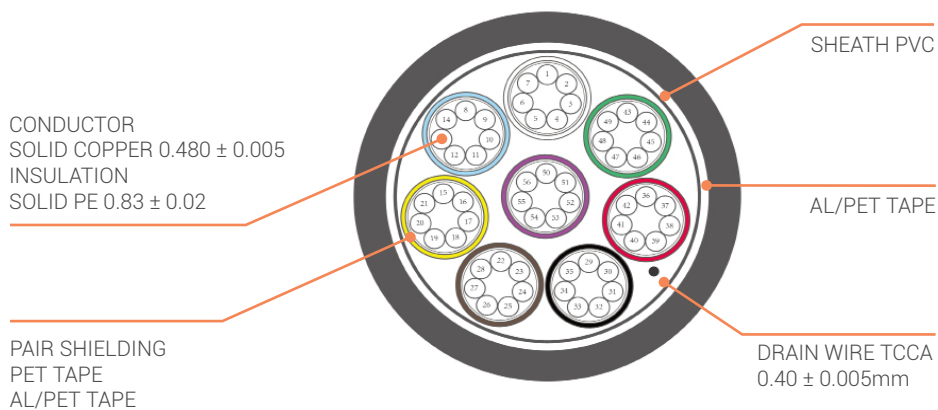


ORSYT1AI xP AWG24

Cat.3 INSTALLATION CABLE FOR NUMERIC TELEPHONE

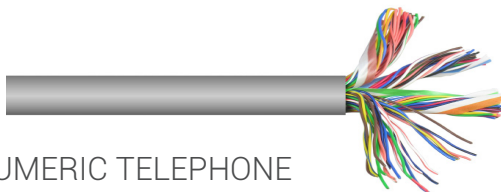

Available Color : ● ●

Packing Available:



PROPERTIES

VOLTAGE ENDURANCE	300 V
TEMPERATURE RANGE	-10°C~+70°C
DIELECTRIC STRENGTH	DC 1500V during 1 min.
INSULATION RESISTANCE	1500 MΩ.Km
CONDUCTOR RESISTANCE	101 Ω/KM

COLOUR OF BUNDLES BINDER

BUNDLE NO	1	2	3	4	5	6	7	8
COLOUR	WHITE	BLUE	YELLOW	BROWN	BLACK	RED	GREEN	PURPLE

CONSTRUCTION OF BUNDLES ACCORDING TO PAIR NUMBER

NUMBER OF PAIRS	ASSEMBLY OF BUNDLES	NUMBER OF PAIRS	ASSEMBLY OF BUNDLES
10	1 BUNDLE OF 10 PAIRS	15	1 BUNDLE OF 15 PAIRS
30	4 BUNDLES OF 7 PAIRS + 2 PAIRS	56	8 BUNDLES OF 7 PAIRS / 4 BUNDLES OF 14 PAIRS

ORSYT1AI xP AWG24



Cat.3 INSTALLATION CABLE FOR NUMERIC TELEPHONE

COLOR CODE FROM 1 PAIR TO 112 PAIRS

Pair No	Wire 1	Wire 2	Pair No	Wire 1	Wire 2	Pair No	Wire 1	Wire 2	Pair No	Wire 1	Wire 2
1 / 29	Light Blue	White	8 / 36	Grey	White	15 / 43	Orange	White	22 / 50	Purple	White
2 / 30	Light Blue	Blue	9 / 37	Grey	Blue	16 / 44	Orange	Blue	23 / 51	Purple	Blue
3 / 31	Light Blue	Yellow	10 / 38	Grey	Yellow	17 / 45	Orange	Yellow	24 / 52	Purple	Yellow
4 / 32	Light Blue	Brown	11 / 39	Grey	Brown	18 / 46	Orange	Brown	25 / 53	Purple	Brown
5 / 33	Light Blue	Black	12 / 40	Grey	Black	19 / 47	Orange	Black	26 / 54	Purple	Black
6 / 34	Light Blue	Red	13 / 41	Grey	Red	20 / 48	Orange	Red	27 / 55	Purple	Red
7 / 35	Light Blue	Green	14 / 42	Grey	Green	21 / 49	Orange	Green	28 / 56	Purple	Green

ORDERING INFORMATION

ITEM	THICKNESS ± 10%(mm)	OUTER DIAMETER ± 10%(mm)	PACKAGING (MM)	DoP NUMBER
RSY-TELAI224PC	0.4 / 0.6	5.2	C100 / D500 / D1000	RSYT23-17
RSY-TELAI324PC	0.4 / 0.6	5.8	C100 / D500 / D1000	RSYT24-17
RSY-TELAI524PC	0.4 / 0.6	6.4	C100 / D500 / D1000	RSYT25-17
RSY-TELAI1024PC	0.6 / 0.8	8.8	C100 / D500 / D1000	RSYT26-17
RSY-TELAI1524PC	0.6 / 0.8	9.6	C100 / D500 / D1000	RSYT27-17
RSY-TELAI3024PC	0.7 / 0.9	12.4	C100 / D500 / D1000	RSYT28-17
RSY-TELAI5624PC	0.7 / 0.9	15.8	C100 / D500 / D1000	RSYT29-17